


## Eurotruss & Total Structures are proud to present the latest Deck Series.

This model combines strength and durability. With its weight of only 3,2 lbs/sqft (16kg/m<sup>2</sup>) it is one of the lightest and strongest decks in the industry. Guaranteed load capacity of 150 lbs/sqft on a 8x4ft Deck and 750 kg/m<sup>2</sup> on a 2x1m Deck.

A special long centered steel profile ensures full stability and a 45% less deflection.

The Pro Deck is a base for stages, fashion show catwalks, tribunes and conference podiums. All accessories (self-levelling inserts, barrier clamps, stairs clamps or assembly inserts which can be used to hang curtains or advertising banners) are fastened to the section: The platform top is made of waterproof plywood with an anti-slip layer which is standard available in black. You can also choose for a basic plywood deck in multiple colors and even glossy white, black and transparent decks are available in all imperial and metric sizes.

The platforms can be supported by non-adjustable or telescopic legs which make it possible to smoothly and precisely adjust the platform height within 5 different height ranges. Thanks to their structure, the platforms can be installed both, outdoors in different terrains and indoors (inside the buildings, show halls, theatres etc.).

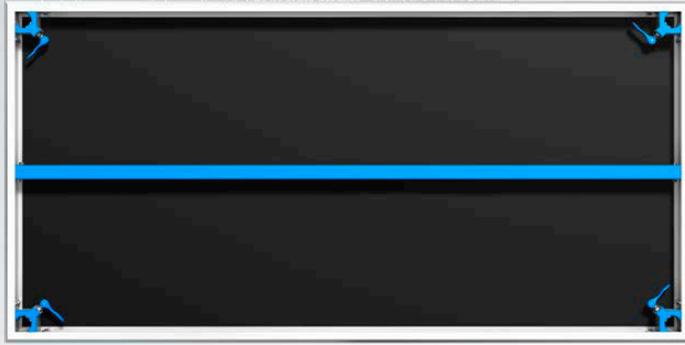


## Upgraded stability design

A longitudinal beam and a special steel profile design ensures full stability and less deflection than other brands in the market. The deflection has been reduced with 45%.

A TÜV certificate and structural reports ensuring maximum safety confirm this high quality.

## New Corner Leg Holder

The new aluminum corner makes a solid leg connection possible; with an easy flip of the new quick-lock lever system the leg connection stays fixated during build-up. You will find many leg holders at various brands made of 2 pieces and equipped with a knob. We redesigned and replaced this by a single solid corner cube with a quick-lock handle. Not only easier to use but also offering a better connection to secure the legs.

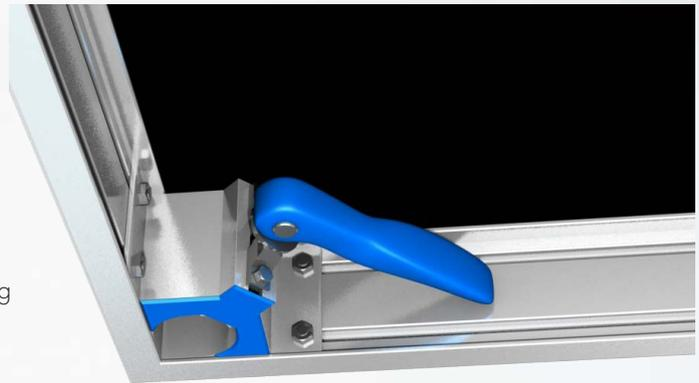


The decks are designed to be supported by fixed, light adjustable and / or telescopic legs which make it possible to raise the platform to the desired height.



## Special profile

All accessories like self-leveling inserts, railing clamps, stairs, clamps or assembly inserts which can be used to hang curtains or advertising banners are fastened to the profile section.

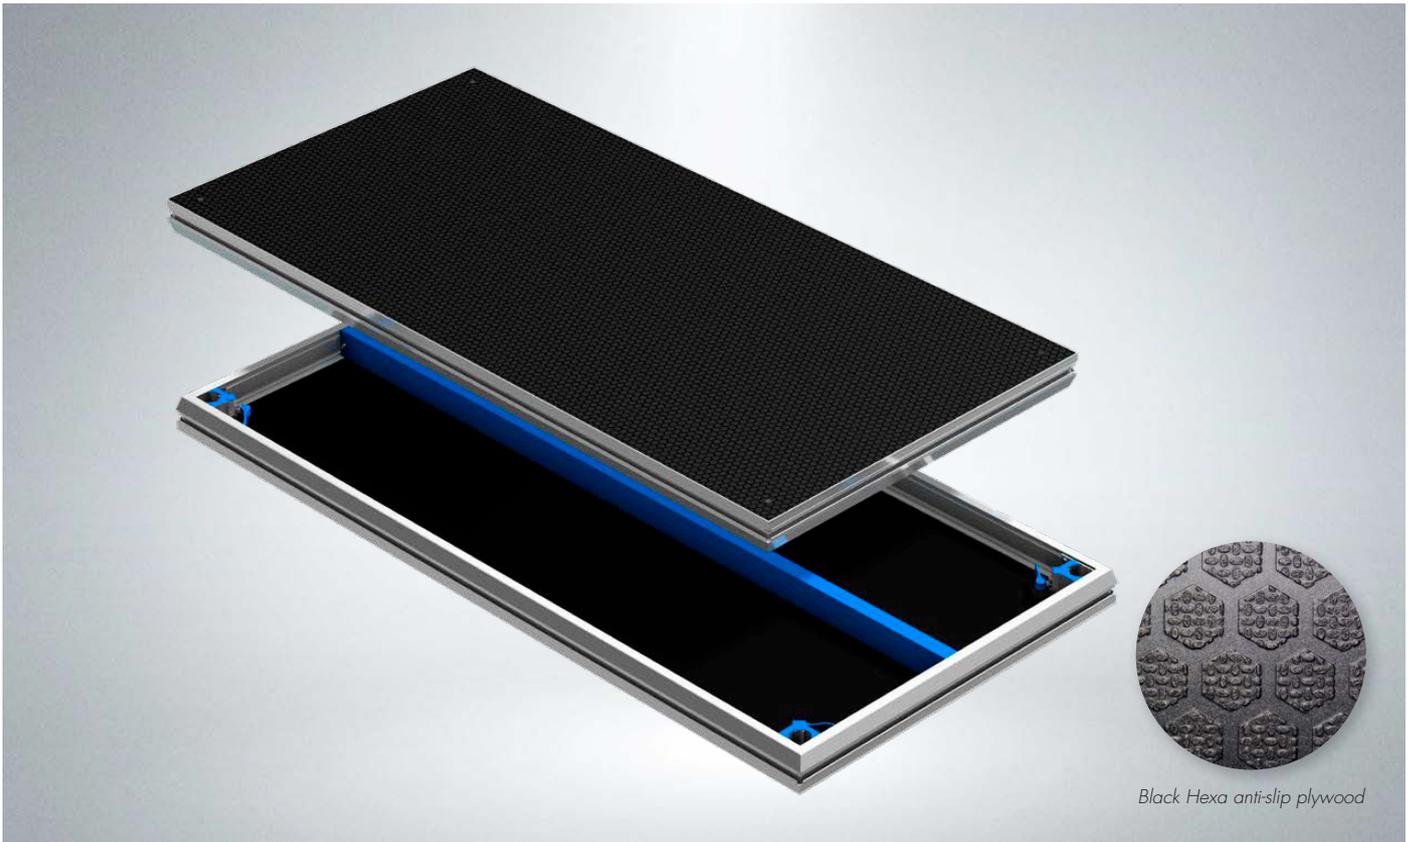

Black Hexa anti-slip plywood

## Pro Deck

Eurotruss & Total Structures are proud to present the latest Deck Series. This model combines strength and durability. With its weight of only 16kg/m<sup>2</sup> (3,2 lbs/sqft) it is one of the lightest and strongest decks in the industry. Guaranteed load capacity of 750 kg/m<sup>2</sup> on a 2x1m Deck and 150 lbs/sqft on a 8x4ft Deck.

A special long centered steel profile ensures full stability and a 45% less deflection. The Pro Deck is a base for stages, fashion show catwalks, tribunes and conference podiums. All accessories (self-levelling inserts, barrier clamps, stairs clamps or assembly inserts which can be used to hang curtains or advertising banners) are fastened to the section: The platform top is made of waterproof plywood with an anti-slip layer which is standard available in black.

You can also choose for a basic plywood deck in multiple colors and even glossy white, black and transparent decks are available in all imperial and metric sizes.

The platforms can be supported by non-adjustable or telescopic legs which make it possible to smoothly and precisely adjust the platform height within 5 different height ranges. Thanks to their structure, the platforms can be installed both, outdoors in different terrains and indoors (inside the buildings, show halls, theatres etc.).

### Facts

- Lightweight, weighs only 16kg p/m<sup>2</sup> , / 3,2 lbs/sqft
- Loading vertical: 750 kg/m<sup>2</sup> , / 150 lbs/sqft (static approved)
- Loading according DIN 15921
- Equipped with Black Hexa anti-slip Plywood
- Applicable on Scaffolding
- TÜV approved and structural report available

### Specifications Standard Size

	Metric	Imperial
Dimensions:	2x1 m.	8x4 ft.
Profile Height:	90 mm.	3,54 in.
Plywood:	12 mm. (Anti-slip)	0,47 in. (Anti-slip)
Weight:	32 kg. (200 x 100 cm.)	101 lbs (8x4ft.)
Material:	EN AW-6082 T6 and Plywood	



## Pro Deck Metric

The popular Eurotruss Pro Deck in Metric sizing, 100% compatible with the existing Eurotruss Decks.

### Pro Deck Imperial Size

Productcode	Size
<i>ED-T-750-2x1</i>	2 x 1 m.
<i>ED-T-750-1x1</i>	1 x 1 m.
<i>ED-T-750-2x0,5</i>	2 x 0,5 m.
<i>ED-T-750-1x0,5</i>	1 x 0,5 m.



## Pro Deck Imperial

The popular Eurotruss Pro Deck in Imperial sizing, 100% compatible with the existing Eurotruss Decks.

### Pro Deck Imperial Size

Productcode	Size
<i>ED-T-750-8x4</i>	8 ft x 4 ft.
<i>ED-T-750-4x4</i>	4 ft x 4 ft.
<i>ED-T-750-8x2</i>	8 ft x 2 ft.
<i>ED-T-750-4x2</i>	4 ft x 2 ft.

# Basic Deck



## Basic Deck

Eurotruss & Total Structures are proud to present the latest Deck Series. This model combines strength and durability. With its weight of only 16kg/m<sup>2</sup> (3,2 lbs/sqft) it is one of the lightest and strongest decks in the industry. Guaranteed load capacity of 750 kg/m<sup>2</sup> on a 2x1m Deck and 150 lbs/sqft on a 8x4ft Deck.

A special long centered steel profile ensures full stability and a 45% less deflection. The Pro Deck is a base for stages, fashion show catwalks, tribunes and conference podiums. All accessories (self-levelling inserts, barrier clamps, stairs clamps or assembly inserts which can be used to hang curtains or advertising banners) are fastened to the section: The platform top is made of waterproof plywood with an anti-slip layer which is standard available in black.

You can also choose for a basic plywood deck in multiple colors and even glossy white, black and transparent decks are available in all imperial and metric sizes.

The platforms can be supported by non-adjustable or telescopic legs which make it possible to smoothly and precisely adjust the platform height within 5 different height ranges. Thanks to their structure, the platforms can be installed both, outdoors in different terrains and indoors (inside the buildings, show halls, theatres etc.).

### Facts

- Lightweight, weighs only 16kg p/m<sup>2</sup>, / 3,2 lbs/sqft
- Loading vertical: 750 kg/m<sup>2</sup>, / 150 lbs/sqft (static approved)
- Loading according DIN 15921
- Equipped with Black Hexa anti-slip Plywood
- Applicable on Scaffolding
- TÜV approved and structural report available

### Specifications Basic Deck

	<b>Metric</b>	<b>Imperial</b>
Dimensions:	200 x 100 cm. (standard)	8x4 ft.
Profile Height:	90 mm.	3,54 in.
Plywood:	12 mm.	0,47 in.
Weight:	16kg/m <sup>2</sup>	3,2 lbs/sqft
Material:	EN AW-6082 T6 and Plywood	

## Basic Deck



## Basic Deck Metric

The basic deck in Metric sizing.

### Basic Deck Metric

Productcode	Size
<i>ED-B-750-2x1</i>	200 x 100 cm.
<i>ED-B-750-1x1</i>	100 x 100 cm.
<i>ED-B-750-2x05</i>	200 x 050 cm.
<i>ED-B-750-1x05</i>	100 x 050 cm.



## Basic Deck Imperial

The E basic deck in Imperial sizing.

### Basic Deck Imperial

Productcode	Size
<i>ED-B-750-8x4</i>	8 x 4 ft.
<i>ED-B-750-4x4</i>	4 x 4 ft.
<i>ED-B-750-8x2</i>	8 x 2 ft.
<i>ED-B-750-4x2</i>	4 x 2 ft.